





TALK
LISTEN
DEFEND
COMM-2

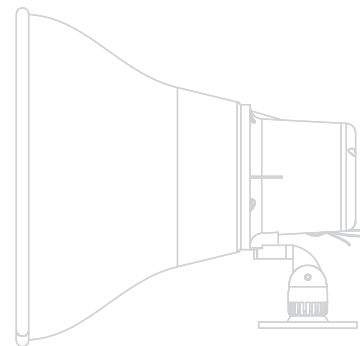

The COMM-2 provides two-way voice communication anywhere. Connects directly to IP cameras with one or two-way audio.

- Extreme weather resistant
- Horn speaker/amplifier/all-weather microphone
- All-in-one convenient package
- 6000+sqft area coverage
- Operating range -40°C to +40°C

1-855-204-1388
www.factorelectronics.com



FACTOR
— ELECTRONICS —

Talk and Listen using IP cameras with the **COMM-2**



Specifications:

Output Power - 15W peak
Max SPL - 122dB
Amplifier - class - D
THD < 1% [amplifier]
THD < 5% [speaker/amplifier]
Input sensitivity 3.5mm balanced - 160mV = full power
Input sensitivity 3.5mm unbalanced - 300mV = full power
Output level 3.5mm balanced - 1V
Output impedance balanced - 1200ohms
Output level 3.5mm unbalanced - 450mV
Output impedance unbalanced - 600ohms
Talk/Listen relay threshold - 35mV +/- 5mV
Speaker type - Re-entrant Horn
Operating temperature -40C / +40C
Warm up time @ -40C approx 2-3 minutes
Horn Bell - powder coated aluminum
Amp housing and mount - powder coated zinc

Inputs/Outputs:

Line input - 3.5mm female
Line output - 3.5mm female
DC input +/- - 9" leads

Power requirements:

24VDC 5A

Dimensions:

Horn/Bell Diameter - 10.5" / 265mm
Depth - 10.5" - 265mm
Height with mount - 10.5" 265mm

Weight:

COMM-2 5lbs - 2.26Kg
Shipping weight - 7.5lbs - 3.4Kg
Master carton 4pcs 30lbs - 13.6Kg



Optional COMM-2-PWR-SUP
24VDC 5A filtered/regulated
power supply



1-855-204-1388

www.factorelectronics.com