

SURFACE MOUNT SPEAKERS THAT MAKE A STATEMENT!




THE **EVOLUTION** AND **ENCORE** SERIES

FACTOR  
— ELECTRONICS —



■ **Factor Electronics IO Series** monitor speakers deliver extraordinary performance by effortlessly providing a richly detailed musical and cinematic experience. Our latest transducer and cabinet technology combine to make a statement. Simply stunning!



■ **Point and shoot!**  
IO-Series speakers can be mounted vertically or horizontally to maximize the sound coverage in your environment. Our unique mounting system provides up/down and lateral adjustments to focus audio where you need it.



■ **START WITH AN INNOVATIVE DESIGN!**  
Conventional cabinet speakers have parallel surfaces inside the cabinet which can cause audio cancellation. IO-Series cabinets minimize parallel surfaces which practically eliminates cancellation.



■ **Versatile!**  
IO-Series speakers are designed to excel in multiple environments like homes, pools, decks, restaurants, bars, coffee shops, schools, retail and commercial buildings. All IO speakers are available with internal 25/70 volt transformers and come equipped with an Bohm transformer bypass and seismic safety cables.



■ **Cool Ideas!**  
We developed a new porting system that channels the sound from our ported magnet structure to vents in the baffle which reinforces bass frequencies. The results? Wow !



**FACTOR**  
— ELECTRONICS —

**EVOLUTIONIO-41B**

**EVOLUTIONIO-41W**



- 80 Watts music power handling
- 4.25" Polycarbonate woofer
- 1.5oz Vented ferrite woofer magnet
- 1" Neodymium silk dome tweeter
- 80Hz-22kHz Frequency response
- 8 Ohms Impedance
- Dispersion 90 degrees
- Efficiency 91dB1W1M
- Gold Plated binding posts
- Includes wall/ceiling brackets
- Includes seismic safety cables
- Colors "W" (white) "B" (black)
- IO-41W/B-70 includes full frequency
- 15 watt 25/70V transformer
- 15/7.5/4 & 2 watt taps
- Sold in pairs

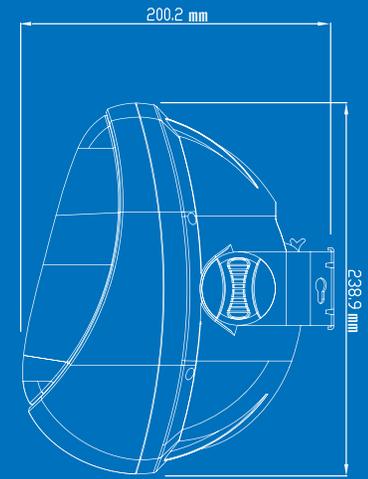
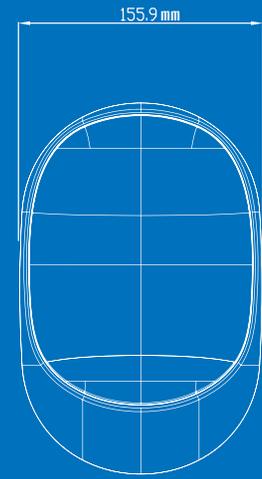


**ENCOREIO-52B**

**ENCOREIO-52W**



- 200 Watts music power handling
- Dual 5.25" anodized aluminum woofers
- Dual 1.5oz Vented ferrite woofer magnets
- 1" Neodymium aluminum/silk dome tweeter
- 70Hz-22kHz Frequency response
- 8 Ohms Impedance
- Dispersion 110 degrees
- Efficiency 90dB 1W1M
- Gold Plated binding posts 12awg
- Includes dual angle wall/ceiling brackets
- Includes seismic safety cables
- Colors "W" (white) "B" (black)
- IO-52W/B-70 includes full frequency
- 30 watt 25/70V transformer
- 30/15/7.5 & 4 watt taps
- Sold in pairs

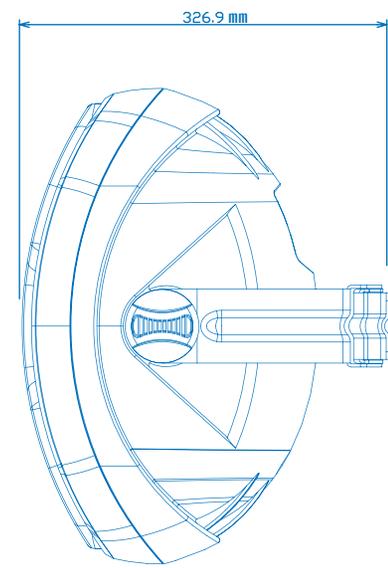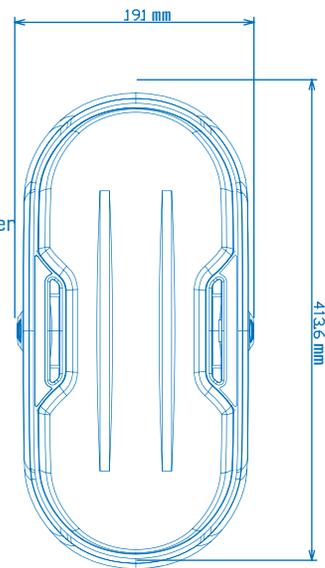

# FACTOR

— ELECTRONICS —

