


### Features:

- Two-way passive high SPL loudspeaker
- Solid 20mm Birch Multi-ply construction
- Steel powder coated grill (dent resistant)
- Cast aluminum frame 15" woofer
- 4 inch edge wound copper clad aluminum voice coil
- High power phase corrected compression horn
- Titanium diaphragm
- Rotate-able horn flange for horizontal mounting
- Audiophile grade internal crossover or active crossover (switchable bi-amp-able)
- High frequency protection circuit
- Steel 1-3/8 pole mount flange
- 14 x M-10 fly points
- Optional 3 x M-10 fly bolts
- Tough coat painted finish

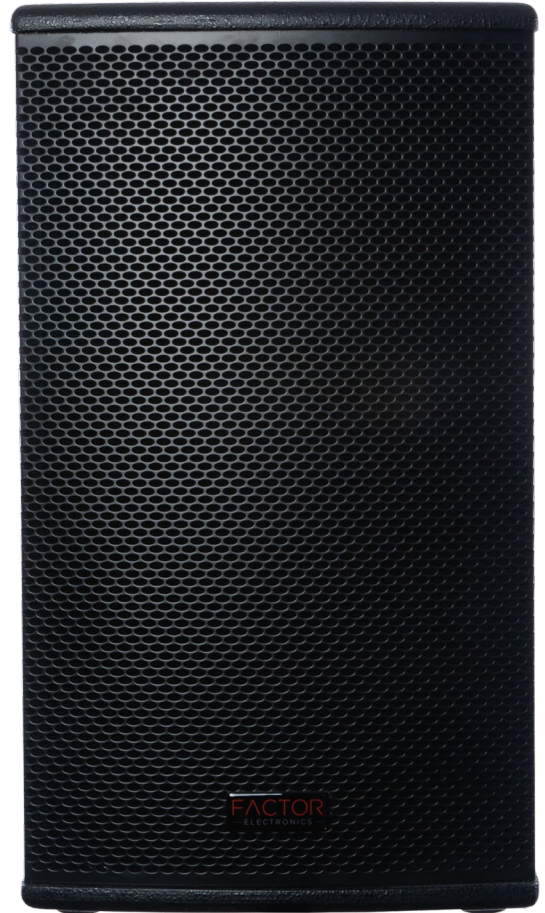

### Specifications:

- Power rating 600W RMS 1200W Peak
- Freq response 45Hz- 20kHz
- Sensitivity 97dB 1W/1M
- Impedance 8 ohms (nominal)
- Crossover 1.5kHz (or switchable to active bi-amp)

### LF:

- 15" cast aluminum frame
- 4" edge wound copper/aluminum voice coil

### HF:

- 3" Phase corrected Titanium compression driver
- Dispersion 80 x 60 (rotate-able horn for horizontal mounting)
- Max SPL 125dB
- Connectors Dual Speakon 4 pin bi-amp or pass through
- 14 x M-10 fly points
- Steel 1-3/8" pole mount flange
- Side handle and rubber feet included

### Dimensions:

(W) x16.9"/430mm (H) x 29.98"/760mm (D) x 16.5" 418.6mm  
Weight: 41kg/90 lbs



Optional 3 x M-10 fly bolts

Cast frame 600W 15 driver 4"VC

