



## Features:

- Four independent 120 watt amplifiers with a six input matrix pre-amp
- 480 watts total amplifier power for larger installations or multi-source multi-zone commercial
- Four paging/music zones with zone volume control & EQ (matrix any source to any zone)
- All-call paging to all zones simultaneously or individual zones (via dip switches)
- Six inputs with individual volume control
- Four Mic/Line inputs on XLR/1/4" combo jacks
- Individually switchable phantom power on all mic inputs
- AUX input on stereo RCA jacks
- Transformer isolated telephone input with zone dip switches and volume control
- Four zone independent line outputs balanced or unbalanced
- On-board monitor section with line level and speaker level outputs
- Headphone output jack (3.5mm stereo) to monitor any zone using headphones
- Treble and Bass adjustments for all mic/line inputs
- Independent mute for all mic/line inputs
- Individual input gain and mix fader controls for all mic/line inputs
- Priority override contacts where a short on the priority terminals mutes inputs 2-5
- Select-able 4ohm, 8ohm, 25V, 70V, 100V outputs for each zone
- Dual voltage switchable power supply 110V-60Hz/220V-50Hz
- Automatic reset protection circuitry
- Includes 3U rack mounting kit
- Three year conditional warranty
- cTUVus Listed





**Specifications:**

AC Input Voltage 110-120V/220-240V Switchable  
 Amplifier Type Class A/B  
 RMS Power @ 4ohms – 120W x 4  
 RMS Power @ 8ohms – 120W x 4  
 RMS Power @ 25V – 120W x 4  
 RMS Power @ 70V – 120W x 4  
 RMS Power @ 100V – 120W x 4  
 S/N Ratio >80dB  
 Frequency Response (+/-3dB) 60Hz - 18kHz  
 T.H.D.@ Full Power 1.0%  
 Input Sensitivity Mic -52dBV balanced  
 Input Sensitivity Line -10dBV unbalanced  
 Input Sensitivity Aux -6dBV unbalanced  
 Input Sensitivity TEL -10dBV balanced  
 Thermal Protection 75 Degrees Celsius  
 Amplifier protection Overload, Thermal & Short Circuit  
 Output Connectors – Terminal Block screw type  
 Power Consumption – 1200 watts AC


**Dimensions:**

W -19.01" - 483mm  
 H - 5.23" - 133mm (3U)  
 D – 15.55" - 395mm

**Shipping Weight:**

53.57lb/24.3kg  
 Warranty Conditional: 3 years

**Optional Accessories:**

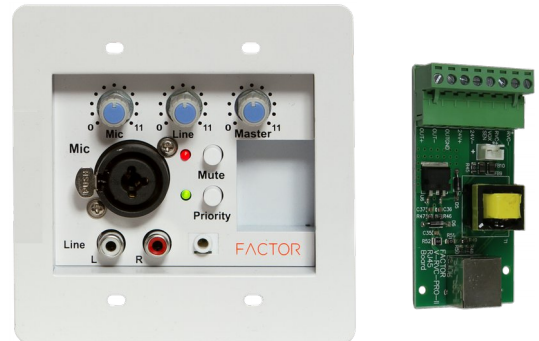

Add The **V-RVC-PRO** and **V-RVC-RJ45** for remote Mic/Line/Blue Tooth inputs up to 2000' from the amplifier over Cat-6



Add The **Factor-BT** Blue Tooth 5.0 module to the V-RVC-PRO for Blue Tooth music streaming and wireless volume up to 2000' from the amplifier over Cat-6