



### Features:

- 60 watt commercial mixer amplifier
- All-call paging to all zones simultaneously from microphones or telephone systems
- Five inputs with individual volume control
- Three Mic/Line inputs on XLR/1/4" combo jacks
- Individually switchable phantom power on all mic inputs
- AUX input, Line Out + Pre-out/Amp in
- Transformer isolated telephone input
- Dual MOH "Music on hold" outputs 600ohm balanced & 8ohm 1W
- 24V emergency operation or mobile operation
- Dual voltage switchable power supply 110V-60Hz/220V-50Hz
- Automatic reset protection circuitry
- Optional 2U rack mounting kit (X-RK2U)
- Three year conditional warranty
- cTUVus Listed



Optional 2U rack kit  
X-RK2U





### Specifications:

AC Input Voltage 110-120V/220-240V Switchable  
 DC Input Voltage 24VDC  
 Amplifier Type Class A/B  
 RMS Power @ 4ohms - 60-70W  
 RMS Power @ 25V - 60-70W  
 RMS Power @ 70V - 60-70W  
 RMS Power @ 100 Volts 60-70W  
 RMS Power @ 24VDC -40W  
 S/N Ratio >80dB  
 Frequency Response (+/-3dB) 80Hz - 16kHz  
 T.H.D.@ Full Power 1.0%  
 Input Sensitivity Mic -52dBV balanced  
 Input Sensitivity Line -10dBV unbalanced  
 Input Sensitivity Aux -6dBV unbalanced  
 Input Sensitivity TEL -10dBV balanced  
 Thermal Protection 75 Degrees Celsius  
 Amplifier protection Overload, Thermal & Short Circuit  
 Output Connectors – Terminal Block screw type, RCA

### Dimensions:

W -16.53" - 420mm  
 H - 3.5" - 89mm (2U)  
 D – 10.2" - 260mm


### Shipping Weight:

17lb/7.27kg

### Warranty Conditional:

3 years

### Optional Accessories:

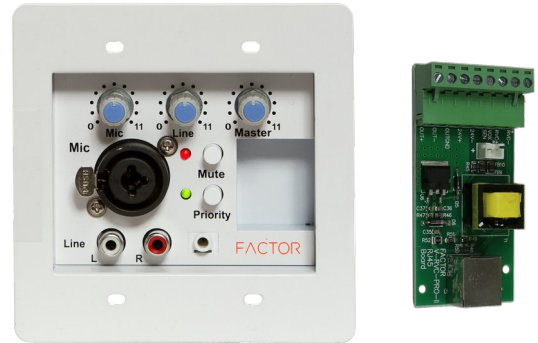

Add The **V-RVC-PRO** and **V-RVC-RJ45** for remote Mic/Line/Blue Tooth inputs up to 2000' from the amplifier over Cat-6



Add The **Factor-BT** Blue Tooth 5.0 module to the V-RVC-PRO for Blue Tooth music streaming and wireless volume up to 2000' from the amplifier over Cat-6